

MAGNETIC SHIELDED SURFACE-MOUNT POWER INDUCTORS

SDRH1205 SERIES



FEATURES:

- Shielded Structure
- Flat-top for pick and place
- Low Resistance Allow high Current
- Excellent Thermal Stability
- Low profile

APPLICATIONS:


- Ideal for a variety of DC-DC converter Inductors Applications.
- DC/DC converter
- Power supplies for portable communication equipment
- LCD, TV, PDA, PDP
- Notebook computer

STANDARD SPECIFICATION:

Part Number	Marking	Inductance L(μH) @10KHz,0.1V	DCR(Ω)	IDC(A)
SDRH1205-100□	100	10	0.025	4.00
SDRH1205-120□	120	12	0.027	3.50
SDRH1205-150□	150	15	0.030	3.30
SDRH1205-180□	180	18	0.030	3.00
SDRH1205-220□	220	22	0.036	2.80
SDRH1205-270□	270	27	0.051	2.30
SDRH1205-330□	330	33	0.057	2.10
SDRH1205-390□	390	39	0.068	2.00
SDRH1205-470□	470	47	0.075	1.80
SDRH1205-560□	560	56	0.11	1.70
SDRH1205-680□	680	68	0.12	1.50
SDRH1205-820□	820	82	0.14	1.40
SDRH1205-101□	101	100	0.16	1.30
SDRH1205-121□	121	120	0.17	1.10
SDRH1205-151□	151	150	0.23	1.00
SDRH1205-181□	181	180	0.29	0.90
SDRH1205-221□	221	220	0.40	0.80
SDRH1205-271□	271	270	0.46	0.75
SDRH1205-331□	331	330	0.51	0.68
SDRH1205-391□	391	390	0.69	0.65
SDRH1205-471□	471	470	0.77	0.58
SDRH1205-561□	561	560	0.86	0.54
SDRH1205-681□	681	680	1.20	0.48
SDRH1205-821□	821	820	1.34	0.43
SDRH1205-102□	102	1000	1.53	0.40

□ K=10%,M=20%

PHYSICAL CHARACTERISTICS:

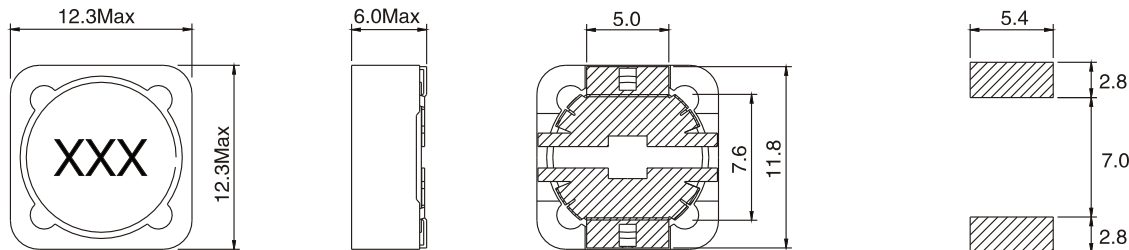

Test Equipment and Conditions

- ◆ Inductance is measured with HP-4284A LCR meter or equivalent.
- ◆ Maximum allowable DC current is that which causes a 25% inductance reduction of the initial value, or coil temperature to rise by 40°C, whichever is smaller. (Reference ambient temperature 20°C)
- ◆ Operating temperature: -25°C~+85°C.