

MAGNETIC SHIELDED SURFACE-MOUNT POWER INDUCTORS

SDRH0605 SERIES



FEATURES:

- Shielded Structure
- Flat-top for pick and place
- Low Resistance Allow high Current
- Excellent Thermal Stability
- Low profile

APPLICATIONS:


- Ideal for a variety of DC-DC converter Inductors Applications.
- DC/DC converter
- Power supplies for portable communication equipment
- LCD, TV, PDA, PDP
- Notebook computer

STANDARD SPECIFICATION:

Part Number	Marking	Inductance L(μH) @10KHz,0.1V	DCR(Ω)	IDC(A)
SDRH0605-100□	100	10	0.12	1.35
SDRH0605-120□	120	12	0.13	1.20
SDRH0605-150□	150	15	0.18	1.10
SDRH0605-180□	180	18	0.24	1.00
SDRH0605-220□	220	22	0.27	0.91
SDRH0605-270□	270	27	0.30	0.82
SDRH0605-330□	330	33	0.33	0.75
SDRH0605-390□	390	39	0.37	0.69
SDRH0605-470□	470	47	0.52	0.62
SDRH0605-560□	560	56	0.56	0.58
SDRH0605-680□	680	68	0.63	0.52
SDRH0605-820□	820	82	0.71	0.47
SDRH0605-101□	101	100	1.03	0.43
SDRH0605-121□	121	120	1.15	0.39
SDRH0605-151□	151	150	1.68	0.35
SDRH0605-181□	181	180	1.87	0.32
SDRH0605-221□	221	220	2.08	0.29
SDRH0605-271□	271	270	2.37	0.26
SDRH0605-331□	331	330	2.67	0.25
SDRH0605-391□	391	390	2.94	0.22
SDRH0605-471□	471	470	3.93	0.20
SDRH0605-561□	561	560	5.45	0.18
SDRH0605-681□	681	680	7.32	0.17
SDRH0605-821□	821	820	8.24	0.15
SDRH0605-102□	102	1000	9.24	0.14

□ K=10%,M=20%

PHYSICAL CHARACTERISTICS:

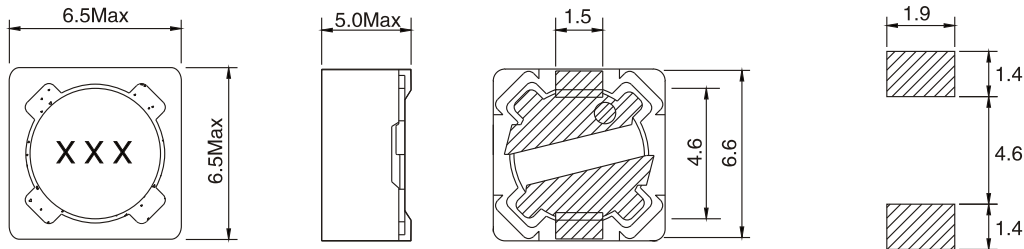

Test Equipment and Conditions

- ◆ Inductance is measured with HP-4284A LCR meter or equivalent.
- ◆ Maximum allowable DC current is that which causes a 25% inductance reduction of the initial value, or coil temperature to rise by 40°C, whichever is smaller. (Reference ambient temperature 20°C)
- ◆ Operating temperature: -25°C~+85°C.