

MAGNETIC SHIELDED SURFACE-MOUNT POWER INDUCTORS

SDRH2D11 SERIES



FEATURES:

- Magnetically Shielded Structure
- Low DC Resistance
- Large current up to 0.9A
- Excellent Mechanical Strength
- High Reliability and Excellent Solderability
- Low and square Profile
- High heat resistance

COMMON APPLICATIONS:

- VCRs, Notebook, DC/DC Converters
- Video Digital Cameras
- Communication System
- Automotive Systems Power supplier
- LCD PDP Televisions
- Hard Disk Drives, Topset, XDSL
- Network Systems
- Computer Peripheral Equipment


ELECTRICAL CHARACTERISTICS:

Part Number	L μ H	Test Freq KHz	DCR Ω Max	IDC Max A
SDRH2D11-1R5□	1.5	100	0.068	0.90
SDRH2D11-2R2□	2.2	100	0.098	0.78
SDRH2D11-3R3□	3.3	100	0.123	0.60
SDRH2D11-4R7□	4.7	100	0.170	0.50
SDRH2D11-6R8□	6.8	100	0.260	0.44
SDRH2D11-100□	10	100	0.400	0.35
SDRH2D11-220□	22	100	1.000	0.25


Note:1. K= ± 10%,M= ± 20%,N= ± 30%

TECHNICAL INFORMATION & PHYSICAL CHARACTERISTICS:

DIMENSIONS IN:mm

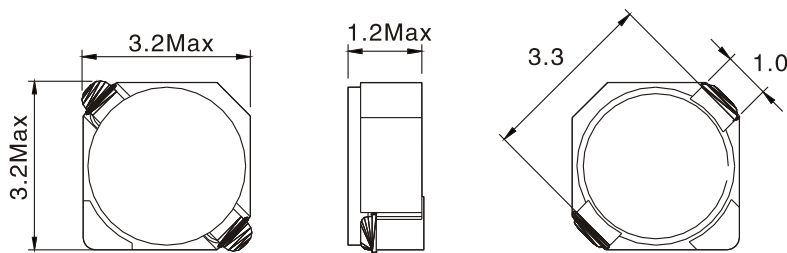

LAND PATTERNS



CONSTRUCTION



- Inductor Testing: HP4284A (Equivalent acceptable)
 - DCR:QuadTech 1880 Milliohmmer
 - Q- HP4342A – SRF-HP4191A
 - IDCMax current is decreased 10% against its initial value
 - Operating temperature: -40°C to +105°C
 - Storage Temperature: -40°C to +105°C
 - Solder methods: Vapor Phase,Infrared Reflow
 - Resistance to soldering heat:260°C for 10 seconds
 - Solvent resistance: Conforms to MIL-STD-202E
 - Marking: Inductance & Tolerance
- Note:All specifications subject to change without notice.