

MAGNETIC SHIELDED SURFACE-MOUNT POWER INDUCTORS

SDRH6025 SERIES



FEATURES:

- Magnetically Shielded Structure
- Low DC Resistance
- Large current up to 2.7A
- Excellent Mechanical Strength
- High Reliability and Excellent Solderability
- Low and square Profile
- High heat resistance

COMMON APPLICATIONS:

- VCRs, Notebook, DC/DC Converters
- Video Digital Cameras
- Communication System
- Automotive Systems Power supplier
- LCD PDP Televisions
- Hard Disk Drives, Topset, XDSL
- Network Systems
- Computer Peripheral Equipment


ELECTRICAL CHARACTERISTICS:

Part Number	L (μH)	Test Freq (kHz)	DCR Ω Max	IDC Max A
SDRH6025-1R0□	1.0	100	0.016	2.70
SDRH6025-2R7□	2.7	100	0.022	1.80
SDRH6025-4R7□	4.7	100	0.037	1.50
SDRH6025-6R8□	6.8	100	0.054	1.30
SDRH6025-100□	10	100	0.069	1.00
SDRH6025-150□	15	100	0.102	0.88
SDRH6025-220□	22	100	0.147	0.73
SDRH6025-330□	33	100	0.216	0.59
SDRH6025-470□	47	100	0.288	0.48
SDRH6025-680□	68	100	0.444	0.42
SDRH6025-101□	100	100	0.600	0.33

□:1. K= ± 10%,M= ± 20%,N= ± 30%

TECHNICAL INFORMATION & PHYSICAL CHARACTERISTICS:


DIMENSIONS IN:mm

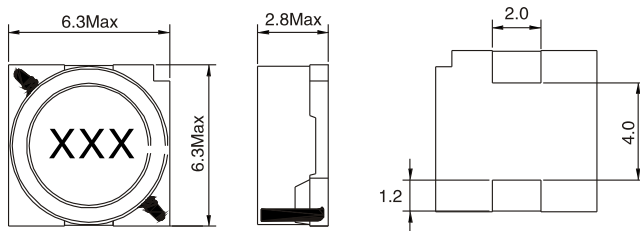

CONSTRUCTION



LAND PATTERNS



- Inductor Testing: HP4284A (Equivalent acceptable)
DCR:QuadTech 1880 Milliohmeter
Q- HP4342A - SRF-HP4191A
IDCMax current is decreased 10% against its initial value
 - Operating temperature: -40°C to +105°C
 - Storage Temperature: -40°C to +105°C
 - Solder methods: Vapor Phase,Infrared Reflow
 - Resistance to soldering heat:260°C for 10 seconds
 - Solvent resistance: Conforms to MIL-STD-202E
 - Marking: Inductance & Tolerance
- Note:All specifications subject to change without notice.