

MAGNETIC SHIELDED SURFACE-MOUNT POWER INDUCTORS

SDRH0603 SERIES



FEATURES:

- Shielded Structure
- Flat-top for pick and place
- Low Resistance Allow high Current
- Excellent Thermal Stability
- Low profile

APPLICATIONS:


- Ideal for a variety of DC-DC converter Inductors Applications.
- DC/DC converter
- Power supplies for portable communication equipment
- LCD, TV, PDA, PDP
- Notebook computer

STANDARD SPECIFICATION:

Part Number	Marking	Inductance L(μH) @10kHz,0.1V	DCR(Ω)	IDC(A)
SDRH0603-3R5□	3R5	3.5	0.027	3.0
SDRH0603-4R7□	4R7	4.7	0.031	2.4
SDRH0603-6R1□	6R1	6.1	0.035	3.25
SDRH0603-7R6□	7R6	7.6	0.054	2.10
SDRH0603-100□	100	10	0.065	1.70
SDRH0603-120□	120	12	0.070	1.55
SDRH0603-150□	150	15	0.084	1.40
SDRH0603-180□	180	18	0.095	1.32
SDRH0603-220□	220	22	0.128	1.20
SDRH0603-270□	270	27	0.142	1.05
SDRH0603-330□	330	33	0.165	0.97
SDRH0603-390□	390	39	0.210	0.86
SDRH0603-470□	470	47	0.238	0.80
SDRH0603-560□	560	56	0.277	0.73
SDRH0603-680□	680	68	0.304	0.65
SDRH0603-820□	820	82	0.390	0.60
SDRH0603-101□	101	100	0.535	0.54
SDRH0603-121□	121	120	0.650	0.30
SDRH0603-151□	151	150	0.820	0.30
SDRH0603-181□	181	180	1.10	0.28
SDRH0603-221□	221	220	1.45	0.24
SDRH0603-271□	271	270	1.72	0.22
SDRH0603-331□	331	330	2.05	0.20
SDRH0603-391□	391	390	2.52	0.18
SDRH0603-471□	471	470	3.12	0.16
SDRH0603-561□	561	560	3.85	0.12
SDRH0603-681□	681	680	4.52	0.11
SDRH0603-821□	821	820	5.29	0.10
SDRH0603-102□	102	1000	7.22	0.08

□ K=10%,M=20%

PHYSICAL CHARACTERISTICS:

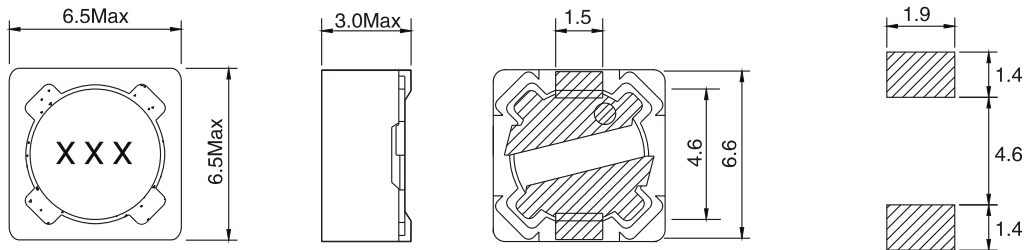

Test Equipment and Conditions

- ◆ Inductance is measured with HP-4284A LCR meter or equivalent.
- ◆ Maximum allowable DC current is that which causes a 25% inductance reduction of the initial value, or coil temperature to rise by 40°C, whichever is smaller. (Reference ambient temperature 20°C)
- ◆ Operating temperature: -25°C~+85°C.